

FTPC75V-C2 series

75W LED Constant voltage Switching Power Supply



■ Features:

- Constant voltage design
- European AC input range
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Built-in active PFC function
- Isolation class II



© ELECTRICAL SPECIFICATION

MODEL	FTPC75V12-C2	FTPC75V24-C2
OUTPUT		
Rated Voltage	12V	24V
Rated Current	6.25A	3.13A
Rated Power	75W	
Power Range	0 ÷ 75W	
Line Regulation	± 1%	
Load Regulation	± 2%	
Voltage Tolerance	[2] ± 5%	
Ripple & Noise (max.)	[3] 150mV _{p-p}	250mV _{p-p}
Setup, Rise, Holdup time	[4] 500ms, 30ms, 15ms	
INPUT		
Voltage Range	200 ÷ 240VAC	
Frequency Range	50/60Hz	
Power Factor (typ.)	PF > 0.9/ 230VAC at full load	
Efficiency (typ.)	90%	
AC current (typ.)	0.5A / 230VAC	
Inrush current (max.)	75A / 230VAC(25°C)	
No Load Power Consumption (max.)	0.21W	
PROTECTIONS		
Over Current	Range: >200% rated output current Recovers automatically after fault condition is removed.	
Short Circuit	Type: hiccup mode. Recovers automatically after fault condition is removed.	
Over voltage	Type: shut down output voltage. Re-power on to recovery.	
Over temperature	Type: shut down output voltage. After temperature goes down re-power on to recovery.	

WORKING ENVIRONMENT

Working Temperature	-20°C ÷ 45°C
Working Humidity	45 ÷ 85% RH non-condensing
Storage Temperature and Humidity	-40°C ÷ 80°C, 10 ÷ 90% RH non-condensing

SAFETY AND EMC REGULATIONS

Safet Standards	Compliance to EN61347-1, EN61347-2-13
Withstand Voltage	IN/OUT: 5.3kVDC/1min
Isolation Resistance	IN/OUT: 50MΩ/500VDC/25°C/70%
EMC Emission	Compliance to EN55015
EMC Immunity	Compliance to EN61547; EN61000-4-2, -3, -4, -5, -6
Harmonic Current	Compliance to EN61000-3-3; EN61000-3-2 class C (≥ 100% load)

OTHERS

Dimensions	159.9 x 57.8 x 18mm (L x W x H)
Weight and Packing	0.4kg; 50pcs./ctn; ctn dimensions: 30 x 20.5 x 16cm

EAN Code		
----------	--	--

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.


2. Tolerance incudes set up tolerance, line regulation and load regulation.

3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.

4. Setup and rise time is measured from 0 to 90% rated output voltage.

5. Power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment must be re-qualify to comply with EMC Directives.

© MECHANICAL SPECIFICATION

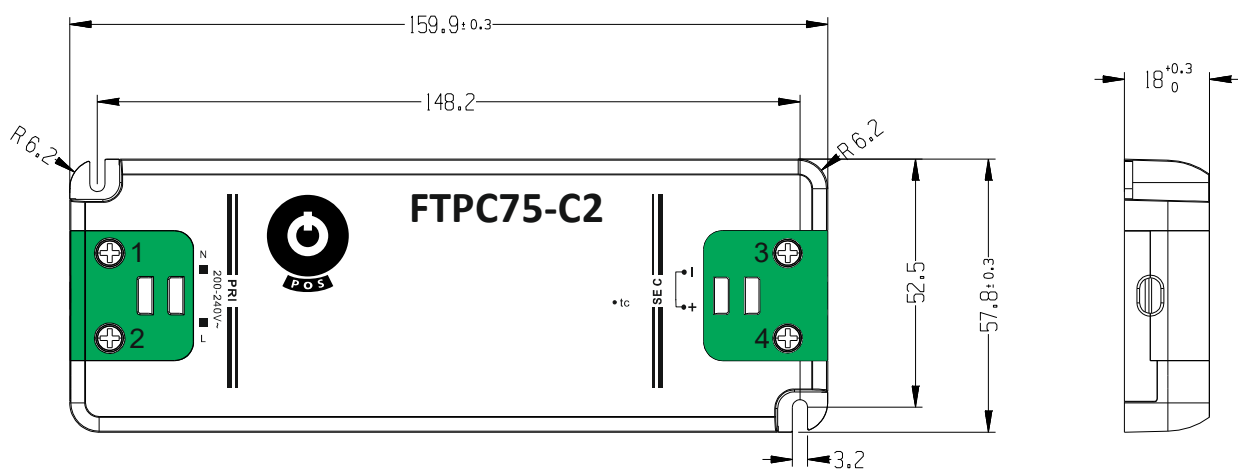

PIN ASSIGNMENT			
No.	Assignment	No.	Assignment
1	Input: AC/N	4	Output: U _{OUT} -
2	Input: AC/L	3	Output: U _{OUT} +