


EX-ALU Extrusion

Ref. A18043

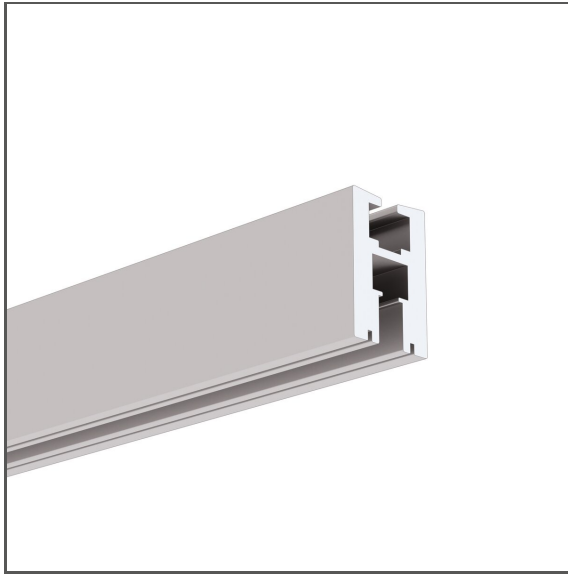

- Backlight and attachment for transparent panels with a thickness of 6 mm | 0.24"
- High mechanical resistance

APPLICATION

- surface mounting and decorative illumination of transparent signs and panels


MOUNTING

- to the surface, using properly selected screws

ADDITIONAL INFORMATION

- with a vertically attached extrusion, the panel must not protrude more than 51 cm from the wall. Its vertical dimension must not be less than 60% of the horizontal dimension
- with a horizontally attached extrusion, the panel must not protrude more than 51 cm from the ceiling
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŠ

TECHNICAL DRAWING

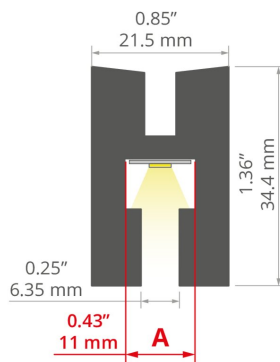


TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver anodized
Possible fixture IP	20
Possible fixture shapes	linear
Profile cross-section	rectangular
Width	0.8"
Height	1.4"
LED gluing width A	0.4"
Number of LED strips A (0.31" wide)	1
Width of the glow	7.5 mm
Max power of a single KLUŠ LED strip	7.3 W/ft
Building type	Retail, Entertainment/ Arts, Hotel / Restaurant, Residential
Facility zone	kitchen, bathroom, under-cabinet / furniture, exhibition / tradeshow / display, decorative, edge lighting
Wire out back of extrusion	yes

Length	Ref
39.4"	A18043A_1
78.9"	A18043A_2

SAMPLE PROJECTS

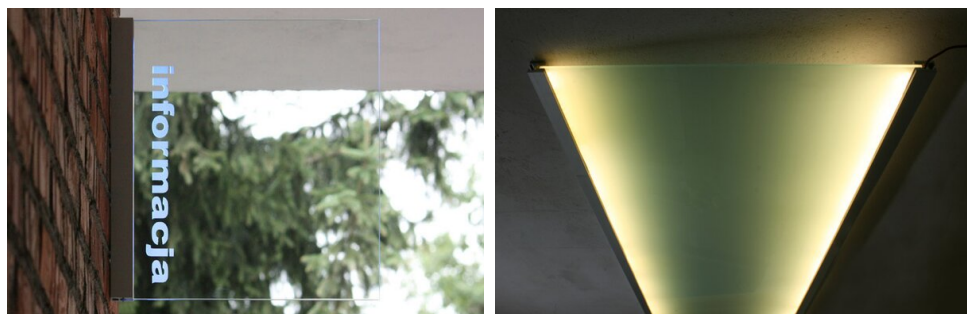

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
EX End cap		steel	<input checked="" type="checkbox"/> gray	C24437N00
EX-3D End cap		PU	<input type="checkbox"/> white	C24363C10
EX-3D-OTW End cap with hole		PU	<input type="checkbox"/> white	C24363C10TW

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
K-HEHD-0480-24 LED tape	- CRI over 95 - High Efficacy	20	1.5 W/ft	K-HEHD22-0480-24 K-HEHD25-0480-24 K-HEHD27-0480-24 K-HEHD30-0480-24 K-HEHD35-0480-24 K-HEHD40-0480-24 K-HEHD50-0480-24
K-HEHD-0960-24 LED tape	- CRI over 95 - High Efficacy	20	2.9 W/ft	K-HEHD22-0960-24 K-HEHD25-0960-24 K-HEHD27-0960-24 K-HEHD30-0960-24 K-HEHD35-0960-24 K-HEHD40-0960-24 K-HEHD50-0960-24

EX-ALU Extrusion

Ref. A18043

Name	Key features	IP protection rating	Power consumption	Ref.
K-HEHD-1440-24 LED tape	- CRI over 95 - High Efficacy	20	4.4 W/ft	K-HEHD22-1440-24 K-HEHD25-1440-24 K-HEHD27-1440-24 K-HEHD30-1440-24 K-HEHD35-1440-24 K-HEHD40-1440-24 K-HEHD50-1440-24
LED tape K-HEHD-1920-24	- CRI over 95 - High Efficacy	20	5.9 W/ft	K-HEHD22-1920-24 K-HEHD25-1920-24 K-HEHD27-1920-24 K-HEHD30-1920-24 K-HEHD35-1920-24 K-HEHD40-1920-24 K-HEHD50-1920-24
K-HEHD-0320-24 LED tape	- CRI over 95 - High Efficacy	20	1 W/ft	K-HEHD22-0320-24 K-HEHD25-0320-24 K-HEHD27-0320-24 K-HEHD30-0320-24 K-HEHD35-0320-24 K-HEHD40-0320-24 K-HEHD50-0320-24

RELATED ACCESSORIES > RELATED LED > CRI 90+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-2400-24	- high power	20	7.3 W/ft	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
K-HEHD-1440-24-40C LED tape	- High Efficacy - cold weather -40F	20	4.4 W/ft	K-HEHD22-1440-24-40C K-HEHD25-1440-24-40C K-HEHD27-1440-24-40C K-HEHD30-1440-24-40C K-HEHD35-1440-24-40C K-HEHD40-1440-24-40C K-HEHD50-1440-24-40C

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	IP protection rating	Power consumption	Ref.
LED tape K-30/18-1770-010V-24V	20	3.5 W/ft	K-30/18-1770-010V-24V

RELATED ACCESSORIES > RELATED LED

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Stripe	20	2.9 W/ft	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	4.4 W/ft	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT

EX-ALU Extrusion

Ref. A18043

Name	Key features	IP protection rating	Power consumption	Ref.
K-RGBW-1920-120-24 LED tape	- RGBW (3000K)	20	5.9 W/ft	K-RGBW-1920-120-24
K-RGBW-1920-160-24 LED tape	- RGBW (3000K)	20	5.9 W/ft	K-RGBW-1920-160-24
KWP-GRGBW-1920-120-24 LED tape	- RGBW (3000K)	65	5.9 W/ft	KWP-GRGBW-1920-120-24