



G-22R Cover

Ref. B17006S, B17006T, B17006C, B17006B

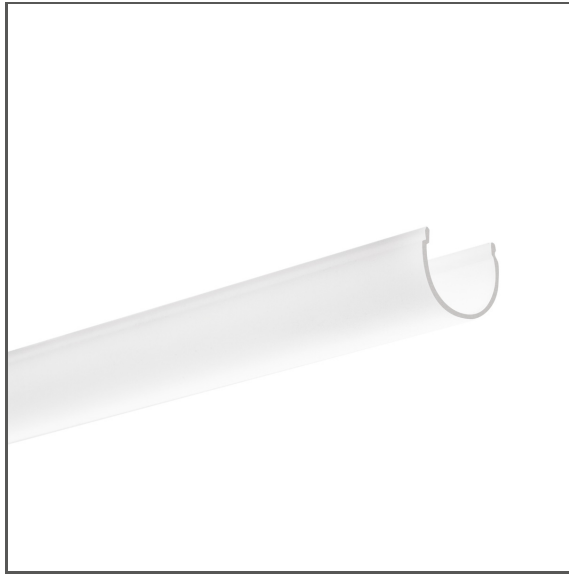

- Resistance to weather conditions

APPLICATION

- LED protection and light diffusion in lighting fixtures


MOUNTING

- Snapped in a dedicated profile

ADDITIONAL INFORMATION

- ATTENTION! rigid cover, not intended for bending or deformation
- standard lengths of KLUŠ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŠ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	PMMA	Finish	Light transmission	Length	High mechanical resistance	Ref
Shape	round	satin	71 %	39.4"	no	B17006S_1
Maximum length on request	236.2"			78.9"		B17006S_2
Width	1"			118.5"		B17006S_3
Height	0.8"	semi-transparent	89 %	78.9"	yes	B17006T_2
UV resistance	yes	clear	94 %	39.4"	yes	B17006C_1
				78.9"		B17006C_2
				118.5"		B17006C_3
		black	20 %	39.4"	no	B17006B_1
				78.9"		B17006B_2

G-22R Cover

Ref. B17006S, B17006T, B17006C, B17006B

RELATED PROFILES > ARCHITECTURAL



GIZA
A05556



GIZA-LL
A00758



GIZA-LL-T
A02479



GIZA-LL-UST
A02724N



GLAZA-LL
A02627




KOZEL
A06454



KOZUS
A07823



KOZUS-CR
A00600



LARKO
A05552



LESTO
B5551



LIPOD
A05554



LOC-30
A18015



LOKOM
A05553



OPAC-30
A06164