



- Backlight of transparent panels
- Supported panel thicknesses: 5-6 mm - 0.2-0.24"

APPLICATION

- Decorative edge illumination for transparent panels


MOUNTING

- to the edge of the panel, using dedicated double-sided adhesive tape

ADDITIONAL INFORMATION

- the extrusion has a decorative function, it is not a construction extrusion
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ


TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum	Width of the glow	5 mm
Color	silver anodized	Max power of a single KLUŚ LED strip	2.9 W/ft
Possible fixture IP	20	Building type	Entertainment/ Arts, Retail, Hotel / Restaurant
Possible fixture shapes	linear	Facility zone	under-cabinet / furniture, exhibition / tradeshow / display, decorative, edge lighting
Profile cross-section	rectangular	Wire out back of extrusion	yes
Length	78.9"		
Width	0.4"		
Height	1"		
LED gluing width A	0.3"		

SAMPLE PROJECTS

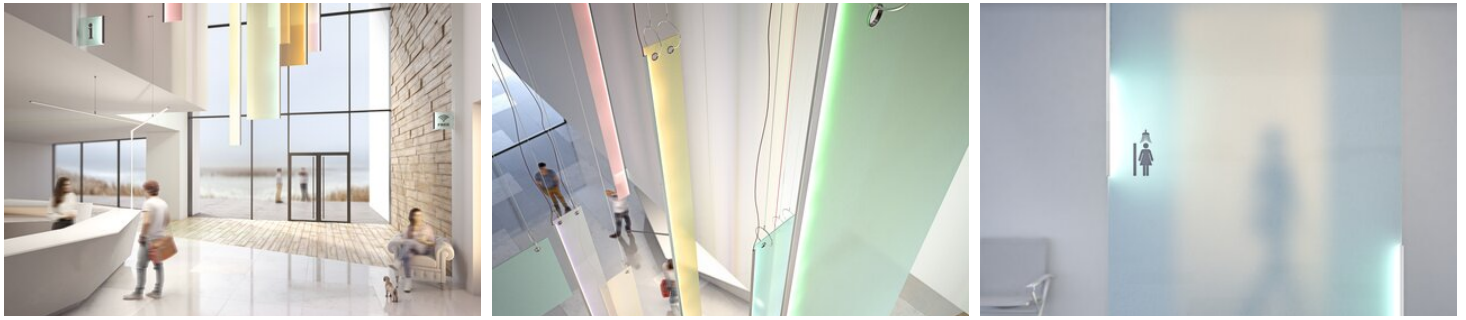

SIMILAR EXTRUSIONS > SURFACE MOUNTED



KRAV-05IN Extrusion
A18045



KRAV-810 Extrusion
A18016AZM

RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
KRAV-56 End cap	PP	gray	C28001C02

RELATED ACCESSORIES > RELATED LED > CRI 90+

Name	Key features	IP protection rating	Power consumption	Ref.
K-1091-24 LED tape	- Thin line of light	20	2.8 W/ft	K-22-1091-24 K-25-1091-24 K-27-1091-24 K-30-1091-24 K-35-1091-24 K-40-1091-24 K-50-1091-24
K-SHD-0960-24 LED tape	- ideal for use with black covers - high LED density	20	2.9 W/ft	K-SHD22-0960-24 K-SHD25-0960-24 K-SHD27-0960-24 K-SHD30-0960-24 K-SHD35-0960-24 K-SHD40-0960-24 K-SHD50-0960-24

KRAV-56 Extrusion

Ref. A18017AZM

Name	Key features	IP protection rating	Power consumption	Ref.
K-SHD-0960-24 LED tape	- ideal for use with black covers - high LED density	20	2.9 W/ft	K-SHD22-0960-24 K-SHD25-0960-24 K-SHD27-0960-24 K-SHD30-0960-24 K-SHD35-0960-24 K-SHD40-0960-24 K-SHD50-0960-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT

Name	Key features	IP protection rating	Power consumption	Ref.
K-RGB-1560-24 LED tape	- RGB	20	4.8 W/ft	K-RGB-1560-24

RELATED ACCESSORIES > RELATED LED

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-0450-24	- Thin line of light	20	1.4 W/ft	K-27-0450-24 K-30-0450-24 K-35-0450-24 K-40-0450-24 K-50-0450-24