

# KRAV-810 Extrusion

Ref. A18016AZM



- Backlight of transparent panels
- Supported panel thicknesses: 8-10 mm - 0.31-0.39"

## APPLICATION

- Decorative edge illumination for transparent panels


## MOUNTING

- to the edge of the panel, using dedicated double-sided adhesive tape

## ADDITIONAL INFORMATION

- the extrusion has a decorative function, it is not a construction extrusion
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŠ

## TECHNICAL DRAWING

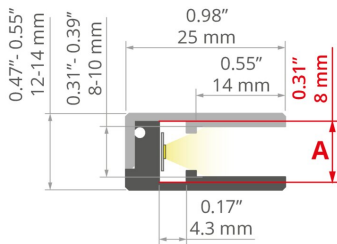


## TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver anodized
Possible fixture IP	20
Possible fixture shapes	linear
Profile cross-section	rectangular
Width	0.6"
Height	1"
LED gluing width A	0.3"
Number of LED strips A (0.31" wide)	1
Width of the glow	22 mm
Max power of a single KLUŠ LED strip	5.9 W/ft
Building type	Entertainment/ Arts, Retail, Hotel / Restaurant
Facility zone	under-cabinet / furniture, exhibition / tradeshow / display, decorative, edge lighting
Wire out back of extrusion	yes

Length	Ref
39.4"	A18016AZM_1
78.9"	A18016AZM_2

## SAMPLE PROJECTS

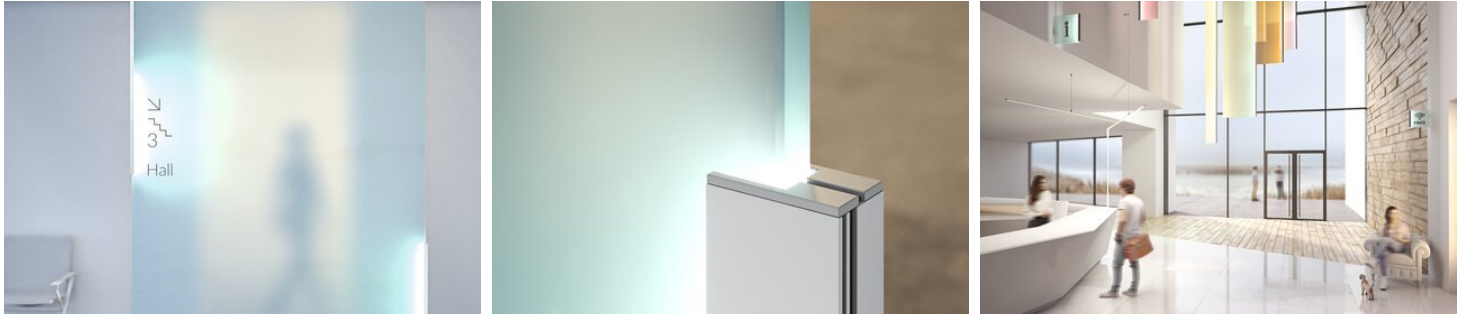

## SIMILAR EXTRUSIONS > SURFACE MOUNTED



**KRAV-05IN Extrusion**  
A18045



**KRAV-56 Extrusion**  
A18017AZM

## RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
KRAV-810 End cap	PP	gray	C28000C02

## RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT

Name	Key features	IP protection rating	Power consumption	Ref.
K-RGB-1560-24 LED tape	- RGB	20	4.8 W/ft	K-RGB-1560-24

## RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-1275-24	- CRI over 95	20	4.4 W/ft	K-CR22-1275-24 K-CR25-1275-24 K-CR27-1275-24 K-CR30-1275-24 K-CR35-1275-24 K-CR40-1275-24 K-CR50-1275-24

# KRAV-810 Extrusion

Ref. A18016AZM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-1220-24	- CRI over 95	20	2.9 W/ft	K-CR22-1220-24 K-CR25-1220-24 K-CR27-1220-24 K-CR30-1220-24 K-CR35-1220-24 K-CR40-1220-24 K-CR50-1220-24
LED tape K-CR-1210-24	- CRI over 95	20	1.5 W/ft	K-CR22-1210-24 K-CR25-1210-24 K-CR27-1210-24 K-CR30-1210-24 K-CR35-1210-24 K-CR40-1210-24 K-CR50-1210-24

## RELATED ACCESSORIES > RELATED LED > CRI 90+

Name	IP protection rating	Power consumption	Ref.
LED tape K-1220-12V	20	2.9 W/ft	K-22-1220-12 K-25-1220-12 K-27-1220-12 K-30-1220-12 K-35-1220-12 K-40-1220-12 K-50-1220-12