

- Hallway lighting
- Three lighting options

APPLICATION

- decorative and warning lighting

MOUNTING


- recessed, using dedicated accessories or mounting adhesive

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

1:2

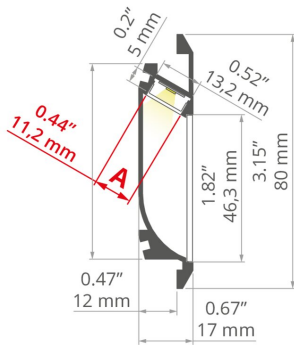


TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver anodized
Possible fixture IP	20
Possible fixture shapes	linear
Profile cross-section	rectangular
Width	0.7"
Height	3.1"
LED gluing width A	0.4"
Number of LED strips A (0.31" wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	7.3 W/ft
Building type	Commercial, Residential, Entertainment/ Arts, Hotel / Restaurant
Facility zone	stairs / hallways, fitness / spa
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Mounting to drywall	yes

Length	Ref
39.4"	A04826A_1
78.9"	A04826A_2

Wire out back of extrusion	yes
----------------------------	-----

SAMPLE PROJECTS

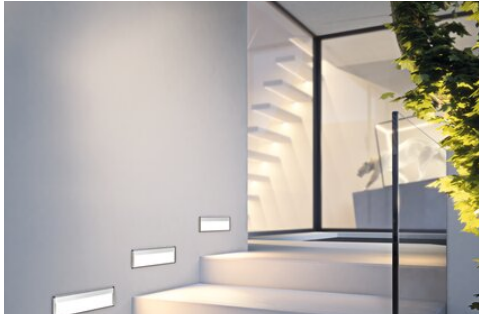

RELATED ACCESSORIES > COVERS

NAME	KEY FEATURES	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
LIGER-11 Cover	<ul style="list-style-type: none"> - indoor use - Ease of obtaining a line of light - perfectly diffusing - high light quality 	PC	21 %	black	B17037B
			59 %	satin	B17037S
KA-11 Cover	<ul style="list-style-type: none"> - maximum brightness - indoor use - basic - universal 	PC	67 %	frosted	B17064F
			89 %	clear	B17064C
DHS Cover		PC	68 %	frosted	B17052M
			94 %	clear	B17052T
HS-11 Cover	<ul style="list-style-type: none"> - For indoor and outdoor applications - UV resistant - high durability 	PC	59 %	frosted	B17208F
			88 %	clear	B17208C

RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
OBIT End cap	PP	gray	C24127C02
		silver	C24127L01

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Key features	IP protection rating	Power consumption	Ref.
K-HEHD-0480-24 LED tape	- CRI over 95 - High Efficacy	20	1.5 W/ft	K-HEHD22-0480-24 K-HEHD25-0480-24 K-HEHD27-0480-24 K-HEHD30-0480-24 K-HEHD35-0480-24 K-HEHD40-0480-24 K-HEHD50-0480-24
K-HEHD-0960-24 LED tape	- CRI over 95 - High Efficacy	20	2.9 W/ft	K-HEHD22-0960-24 K-HEHD25-0960-24 K-HEHD27-0960-24 K-HEHD30-0960-24 K-HEHD35-0960-24 K-HEHD40-0960-24 K-HEHD50-0960-24
K-HEHD-1440-24 LED tape	- CRI over 95 - High Efficacy	20	4.4 W/ft	K-HEHD22-1440-24 K-HEHD25-1440-24 K-HEHD27-1440-24 K-HEHD30-1440-24 K-HEHD35-1440-24 K-HEHD40-1440-24 K-HEHD50-1440-24
LED tape K-HEHD-1920-24	- CRI over 95 - High Efficacy	20	5.9 W/ft	K-HEHD22-1920-24 K-HEHD25-1920-24 K-HEHD27-1920-24 K-HEHD30-1920-24 K-HEHD35-1920-24 K-HEHD40-1920-24 K-HEHD50-1920-24
K-HEHD-0320-24 LED tape	- CRI over 95 - High Efficacy	20	1 W/ft	K-HEHD22-0320-24 K-HEHD25-0320-24 K-HEHD27-0320-24 K-HEHD30-0320-24 K-HEHD35-0320-24 K-HEHD40-0320-24 K-HEHD50-0320-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-27/65-1920-24V	- Tuneable white 2600K-6500K	20	5.9 W/ft	K-27/65-1920-24
LED tape K-22/50-1728-24V	- Tuneable white 2200K-5000K	20	5.3 W/ft	K-22/50-1728-24
LED tape K-30/18-1770-24V		20	3.5 W/ft	K-30/18-1770-24
LED tape K-30/18-1770-010V-24V		20	3.5 W/ft	K-30/18-1770-010V-24V
LED tape KWP-G22/50-1728-24	- Tuneable white 2200K-5000K	65	5.3 W/ft	KWP-G22/50-1728-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-1210-24	- CRI over 95	20	1.5 W/ft	K-CR22-1210-24 K-CR25-1210-24 K-CR27-1210-24 K-CR30-1210-24 K-CR35-1210-24 K-CR40-1210-24 K-CR50-1210-24

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-CR-1220-24	- CRI over 95	20	2.9 W/ft	K-CR22-1220-24 K-CR25-1220-24 K-CR27-1220-24 K-CR30-1220-24 K-CR35-1220-24 K-CR40-1220-24 K-CR50-1220-24
LED tape K-CR-1275-24	- CRI over 95	20	4.4 W/ft	K-CR22-1275-24 K-CR25-1275-24 K-CR27-1275-24 K-CR30-1275-24 K-CR35-1275-24 K-CR40-1275-24 K-CR50-1275-24
K-CRHD-1820-24 LED tape	- CRI over 95 - high LED density	20	5.6 W/ft	K-CRHD22-1820-24 K-CRHD25-1820-24 K-CRHD27-1820-24 K-CRHD30-1820-24 K-CRHD35-1820-24 K-CRHD40-1820-24 K-CRHD50-1820-24
K-CRHD-1910-24 LED tape	- CRI over 95 - high LED density	20	2.8 W/ft	K-CRHD22-1910-24 K-CRHD25-1910-24 K-CRHD27-1910-24 K-CRHD30-1910-24 K-CRHD35-1910-24 K-CRHD40-1910-24 K-CRHD50-1910-24
K-CRHD-0530-24 LED tape,	- CRI over 95	20	1.6 W/ft	K-CRHD22-0530-24 K-CRHD25-0530-24 K-CRHD27-0530-24 K-CRHD30-0530-24 K-CRHD35-0530-24 K-CRHD40-0530-24 K-CRHD50-0530-24

RELATED ACCESSORIES > RELATED LED > CRI 90+

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-2400-24	- high power	20	7.3 W/ft	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24

RELATED ACCESSORIES > RELATED LED

Name	Key features	IP protection rating	Power consumption	Ref.
LED tape K-18D30-0960-24	- Dim To Warm LED Stripe	20	2.9 W/ft	K-18D30-0960-24
LED tape K-27T50-1440-24	- RGB+Tunable White	20	4.4 W/ft	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT

Name	Key features	IP protection rating	Power consumption	Ref.
K-RGBW-1920-120-24 LED tape	- RGBW (3000K)	20	5.9 W/ft	K-RGBW-1920-120-24
K-RGBW-1920-160-24 LED tape	- RGBW (3000K)	20	5.9 W/ft	K-RGBW-1920-160-24
KWP-GRGBW-1920-120-24 LED tape	- RGBW (3000K)	65	5.9 W/ft	KWP-GRGBW-1920-120-24

RELATED ACCESSORIES > OTHER ACCESSORIES > SPRINGS FOR RECESSED MOUNT AND MOUNTING TRACKS

Name	Material	Color	Ref.
KMA Spring	stainless steel	■ silver	C24503N00

RELATED ACCESSORIES > OTHER ACCESSORIES > CONNECTORS

Name	Material	Color	Ref.
ZM-PION-45 Connector	stainless steel	■ silver	42314
ZM-PION-120 Connector	stainless steel	■ silver	42320
ZM-PION-120 Connector	stainless steel	■ silver	C28087N00
ZM Connector	stainless steel	■ silver	42716 42717 42720 42728 C28070N00 C28071N00 C28072N00 C28073N00 C28074N00 C28075N00 C28243N00
ZM-NA Connector	stainless steel	■ silver	42305 42339 42723 42724 42725 C28242N00
ZM-PION Connector	stainless steel	■ silver	42314 42316 42320 42718 42719 C28084N00 C28085N00 C28086N00 C28087N00 C28088N00