

Fastener PUSZ-LIN-ZM

Ref. C28160N00, C28160L10, C28160L07

Ref. arch 42275, 42275L9010, 42275L9005

- Lengthwise suspension on a wire
- High lifting capacity
- Single pole conductivity possible

APPLICATION


- for suspending LED lighting fixtures

MOUNTING

- to the lighting fixture, using a small lock
- to the wire, using a plug and a clamp sleeve



TECHNICAL DRAWING

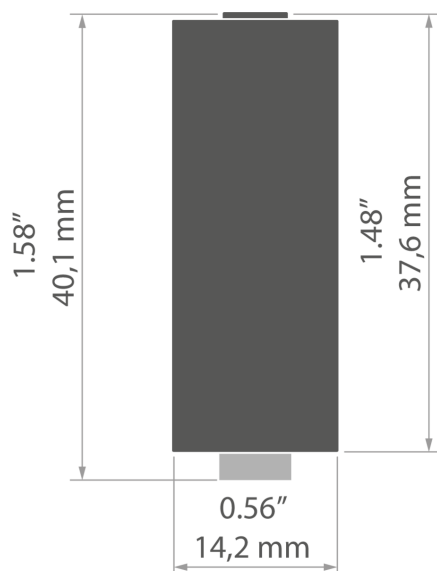

TECHNICAL SPECIFICATIONS

Width	14.2 mm
Height	40.1 mm
Working temperature	55°C
Lifting capacity	30 kg
Maximum current	12 A
Loss of voltage	0.05 V

Material	Color	Ref
stainless steel, brass, nylon	■ silver	C28160N00 42275
aluminum, brass, nylon	□ white lacquered	C28160L10 42275L9010
aluminum, brass, nylon	■ black lacquered	C28160L07 42275L9005

Fastener PUSZ-LIN-ZM

Ref. C28160N00, C28160L10, C28160L07

Ref. arch 42275, 42275L9010, 42275L9005

RELATED PROFILES > ARCHITECTURAL



3035
A18039
Ref. arch 18039



3035-O
A08441
Ref. arch B8441



4050
A18050
Ref. arch 18050



4050-W
A18051
Ref. arch 18051




GIZA
A05556
Ref. arch B5556



GIZA-DUO-LL
A02162
Ref. arch C2162



GIZA-LL
A00758
Ref. arch C0758



JAZ
A08547
Ref. arch B8547




LIPOD
A05554
Ref. arch B5554



OPK-4
A00370
Ref. arch C0370

RELATED PROFILES > FOR MAIN LIGHTING



SEPOD
A06593
Ref. arch B6593

RELATED PROFILES > UNIVERSAL



OLEK
A08505
Ref. arch B8505




PDS-ZM-PLUS
A02056
Ref. arch C2056

Fastener PUSZ-LIN-ZM

Ref. C28160N00, C28160L10, C28160L07

Ref. arch 42275, 42275L9010, 42275L9005

RELATED SYSTEMS > GENERAL LIGHTING SYSTEMS



3035-KOZE
A08441+A18056
Ref. arch 18056+B8441



PK-4
A18044+A00370
Ref. arch 18044+C0370

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > WIRES AND RODS



WIRE
CU FI 0,95 mm
Z70240
Ref. arch 70240